

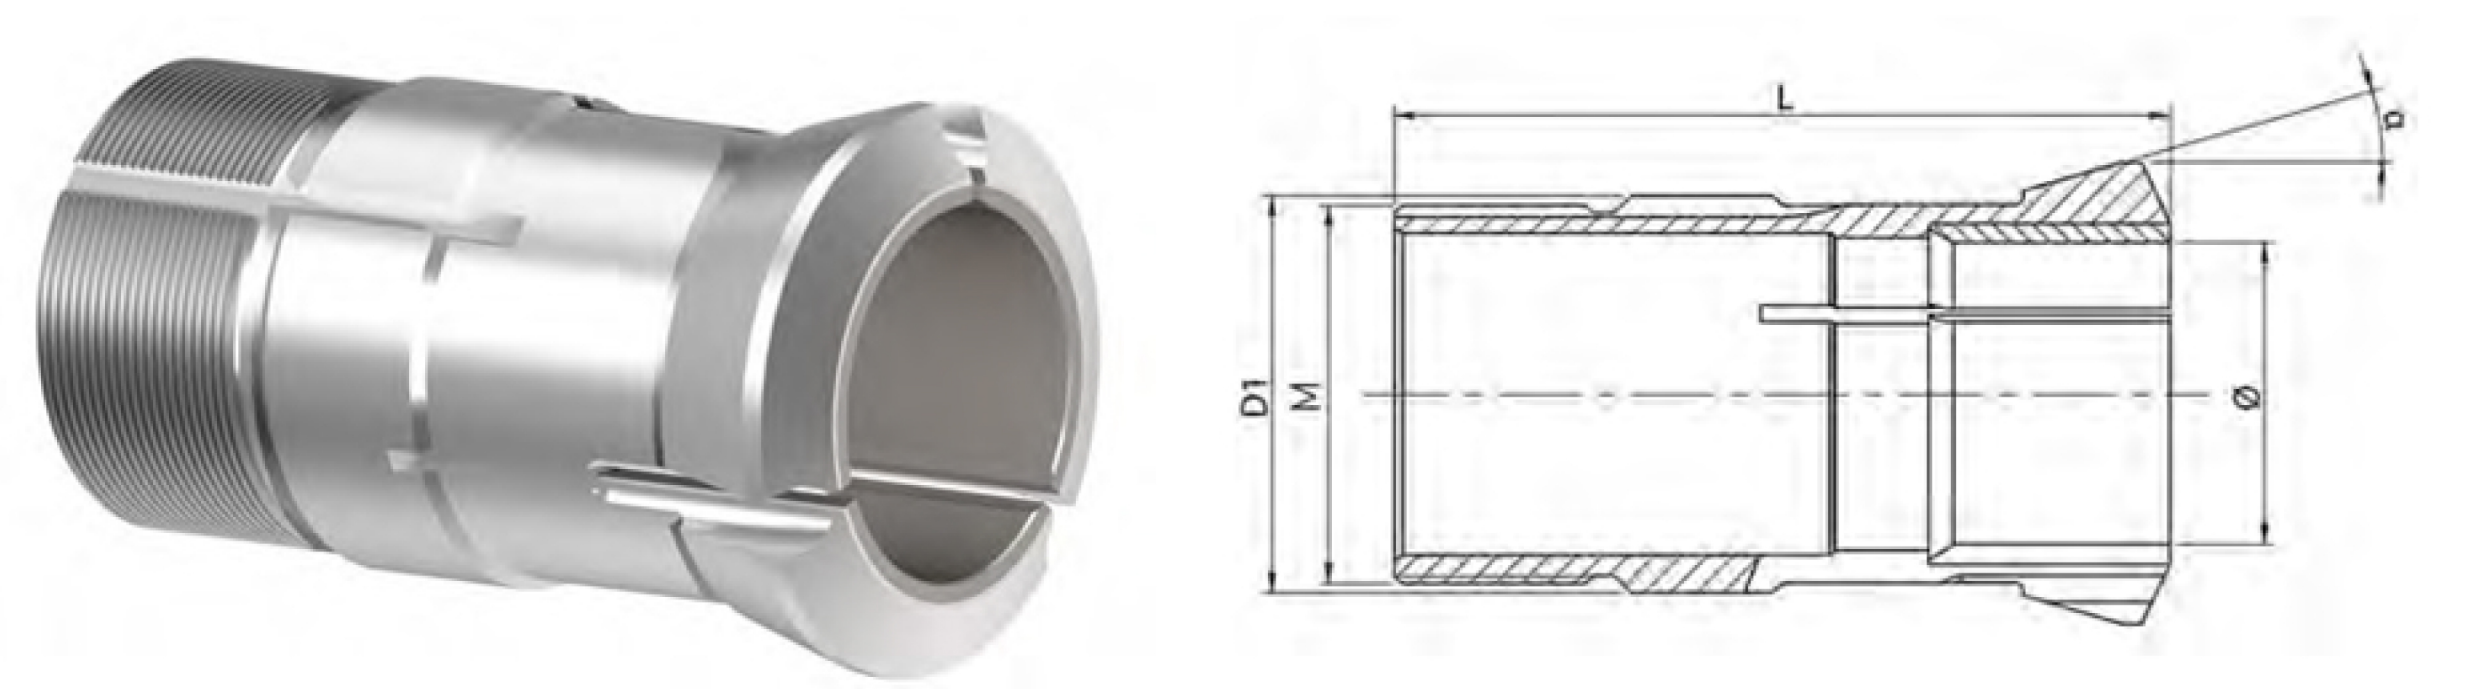


Drawn carbide guide bushings

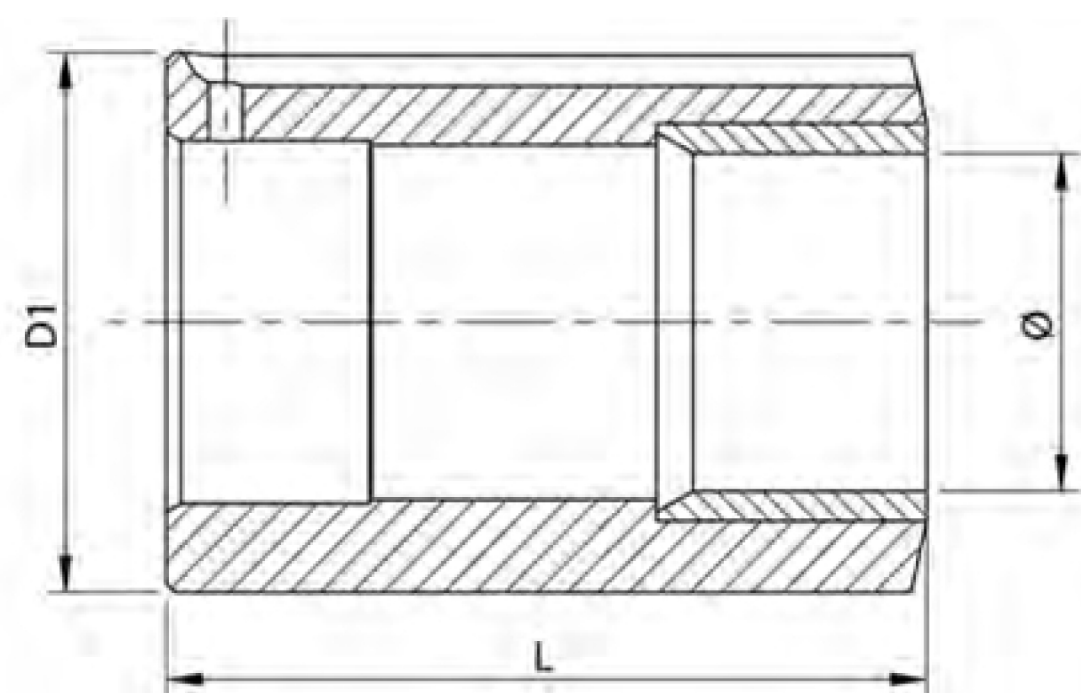


Item No	D1	L	M	α	Ø max	hex. max	square max
3400T	13.00	41.50	M12.50x0.75	15°	8.00	7.00	5.50
3300T	14.00	64.00	M13.00x0.75	16°	8.00	7.00	5.50
TOP100	18.00	100.00	M18.00x1.00	20°	13.00	11.00	9.00
221T	21.00	57.50	M18.00x1.00	12°	11.00	9.50	8.00
3401T	21.00	57.50	M18.00x1.00	12°	11.00	9.50	8.00
221T Traub	21.00	65.50	M18.00x1.00	12°	14.00	12.00	9.00
39001T	22.00	68.00	M22.00x1.00	16°	18.00	15.00	13.00
222T	23.00	73.00	M22.00x1.00	16°	17.00	14.00	11.00
TD26	26.00	77.00	M25.00x1.00	16°	20.00	17.00	14.00
3402T	27.00	57.50	M24.00x1.00	12°	16.00	14.00	11.00
223T	28.00	82.00	M25.00x1.00	16°	21.00	18.00	15.00
227T	34.00	87.50	M34.00x1.00	10°	25.00	22.00	18.00
TOP200	34.00	150.00	M32.00x1.50	20°	26.00	22.00	18.00
228T	41.00	54.00	M38.00x1.00	10°	32.00	27.00	20.00
229T	42.00	82.00	M40.00x1.00	16°	32.00	28.00	23.00
245T	45.00	82.00	M42.00x1.00	16°	32.00	27.00	20.00
249T	48.00	81.00	M46.00x1.00	10°	38.00		
248T	48.00	82.00	M46.00x1.00	16°	38.00	32.00	25.00

Fixed guide bushings

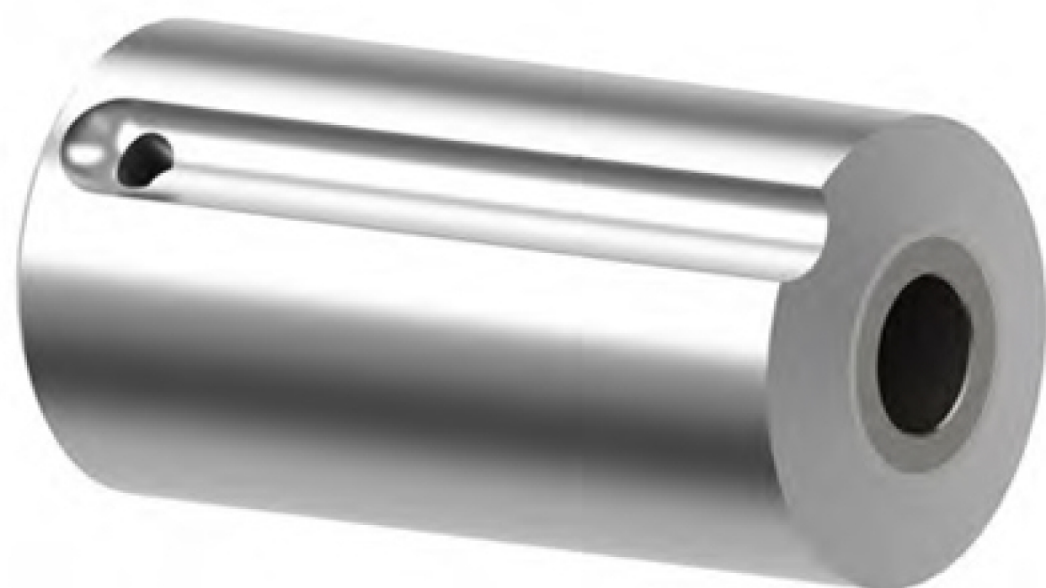

Item No	D1	L	Ø max	hex. max	square max
751	6.00	11.00	3.50	3.00	2.50
501	10.00	15.00	4.50	4.00	3.00
651	12.00	20.00	6.00	5.50	4.00
502	13.00	30.00	7.00	6.00	5.00
503	15.00	30.00	10.00	8.50	7.00
252	16.00	30.00	10.00	8.50	7.00
755	20.00	30.00	12.00	10.50	8.00
504	22.00	32.00	13.00	11.00	9.00
505	24.00	32.00	16.00	14.00	11.00
756	25.00	35.00	16.00	14.00	11.00
253	30.00	35.00	20.00	17.50	14.00
507	32.00	45.00	21.00	18.00	15.00
254	34.00	34.00	22.00	19.50	15.50
758	35.00	35.00	25.00	22.00	18.00
1006	36.00	45.00	25.00	22.00	18.00
508	40.00	45.00	25.00	22.00	18.00
761	50.00	46.00	30.00	26.00	22.00
255	56.00	60.00	27.00	23.00	18.50
256	77.00	80.00	32.00	28.00	22.50

Long carbide execution

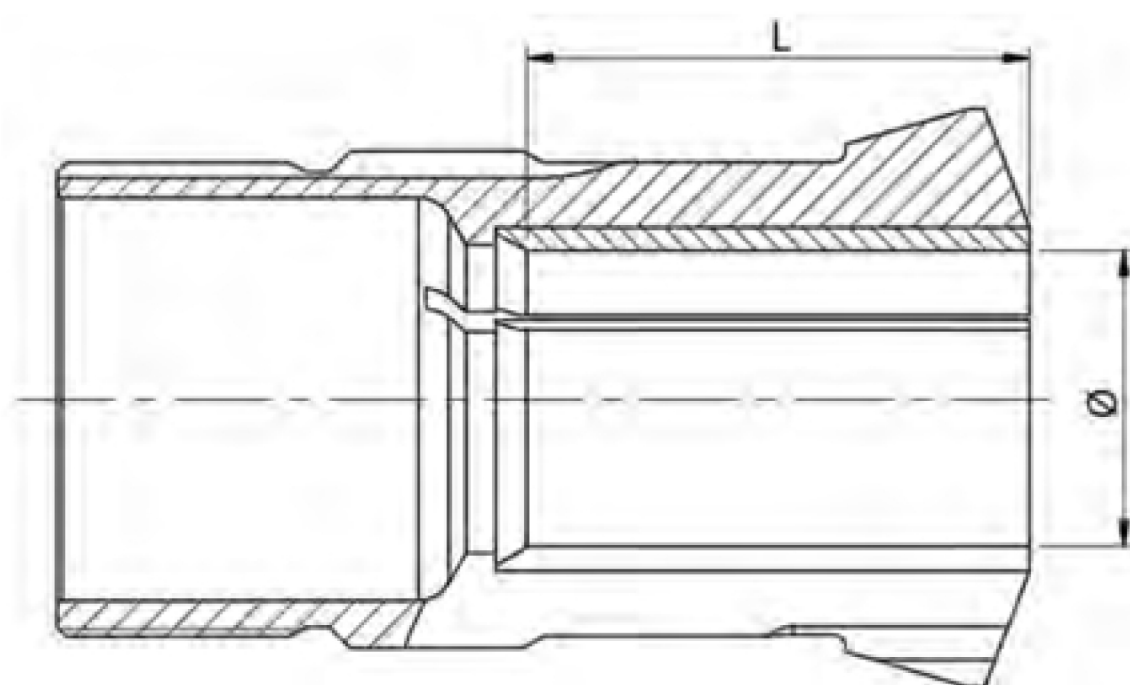

Long carbide lined execution on demande

Following length available :

- 20.00 mm
- 22.50 mm
- 25.00 mm
- 28.00 mm
- 30 - 34 mm
- 35.00 mm
- 40.00 mm
- 42 - 43 mm